

FIG. 100 00000000

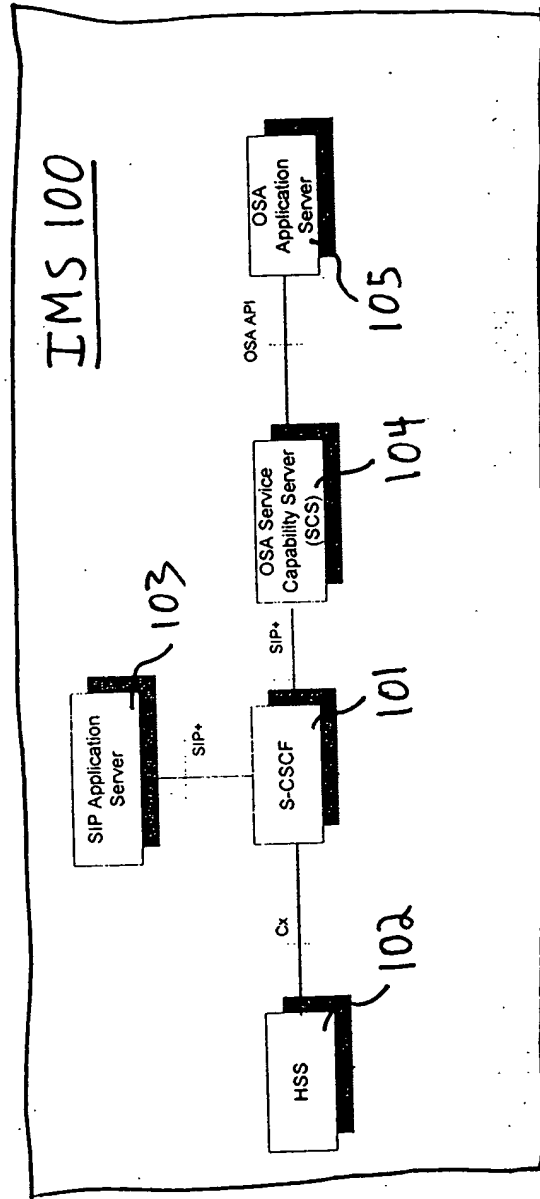


Fig. 1

101280-0623E660

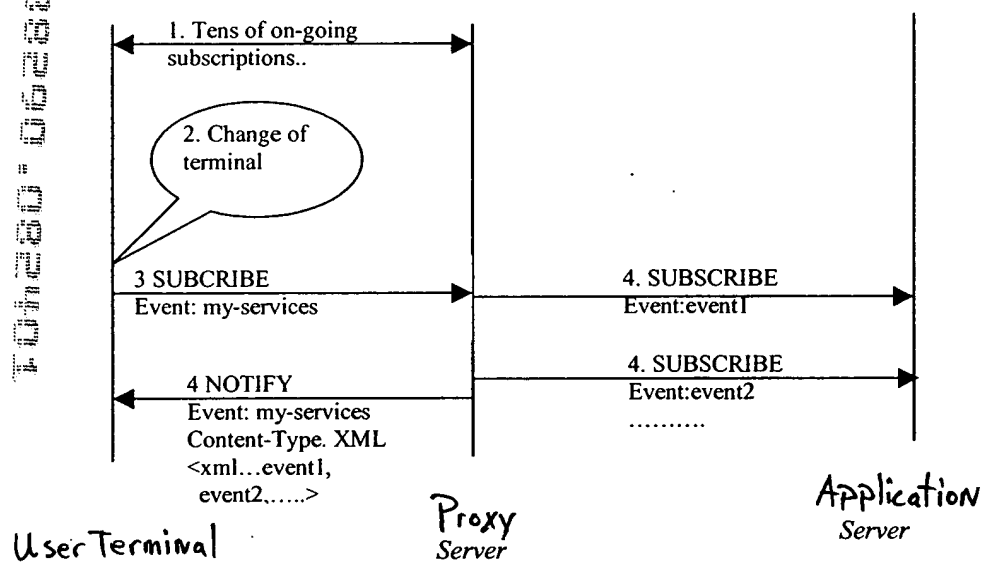


Fig. 2

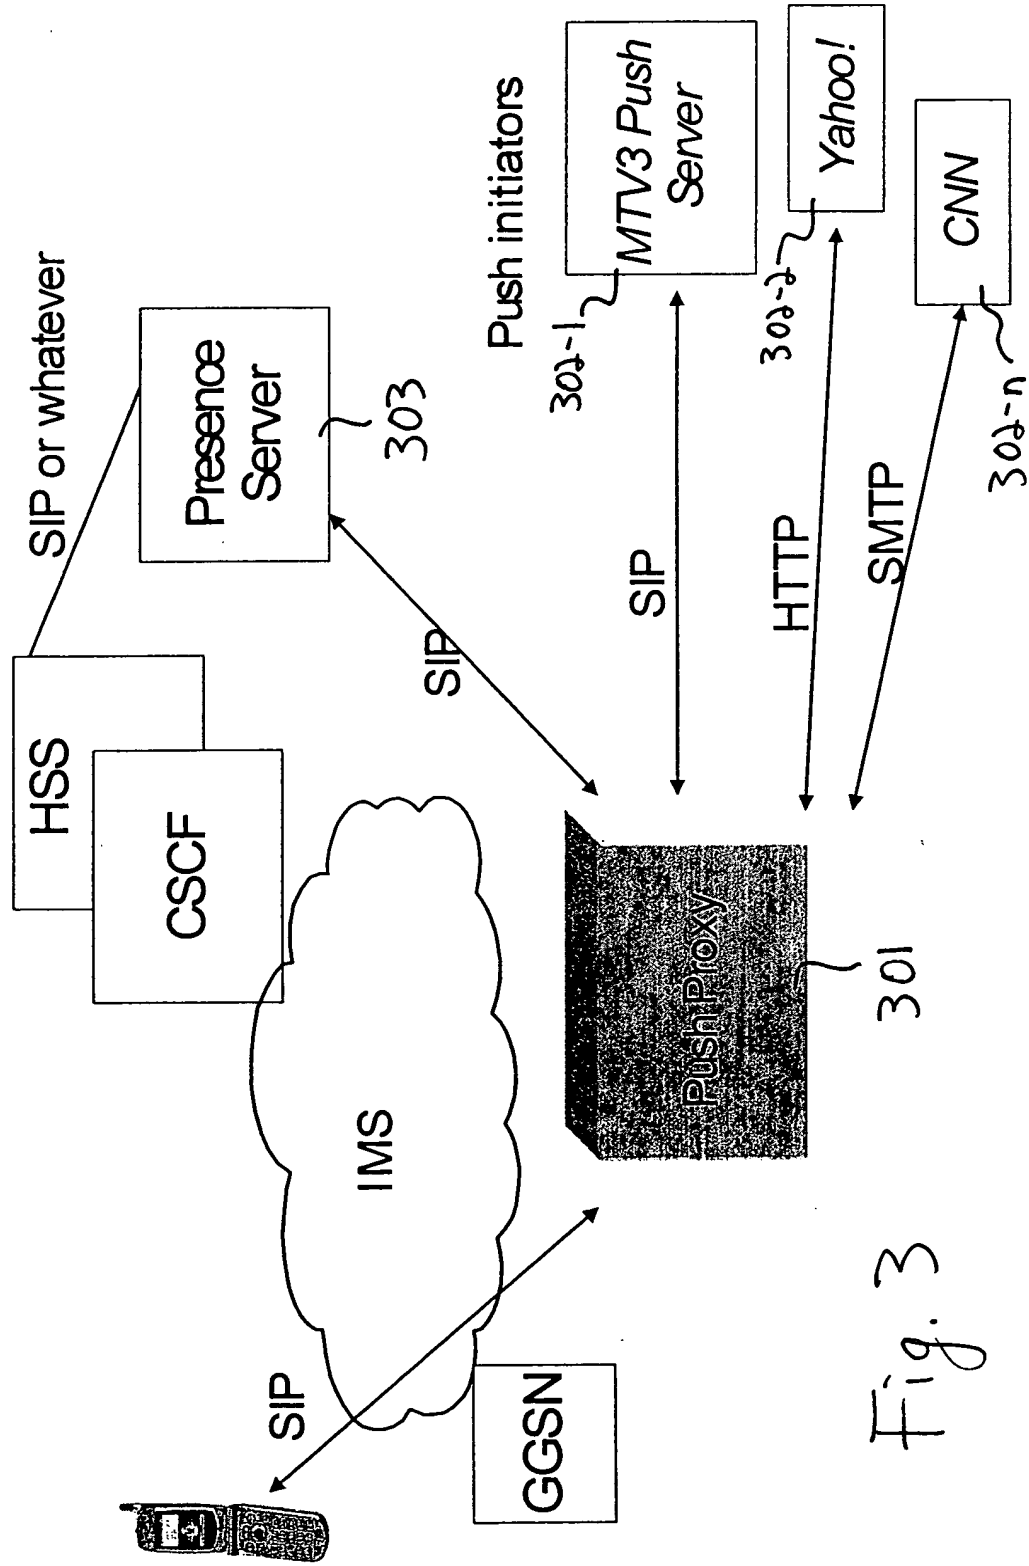


Fig. 3



00000000000000000000




SIP SUBSCRIBE

Event: Push

From: sip:pk@mci.com

Content: XML

<XML allow\_ads=no>

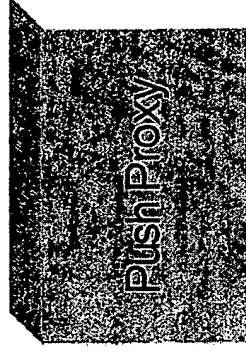

202 Accepted / 200 ok

Fig. 5



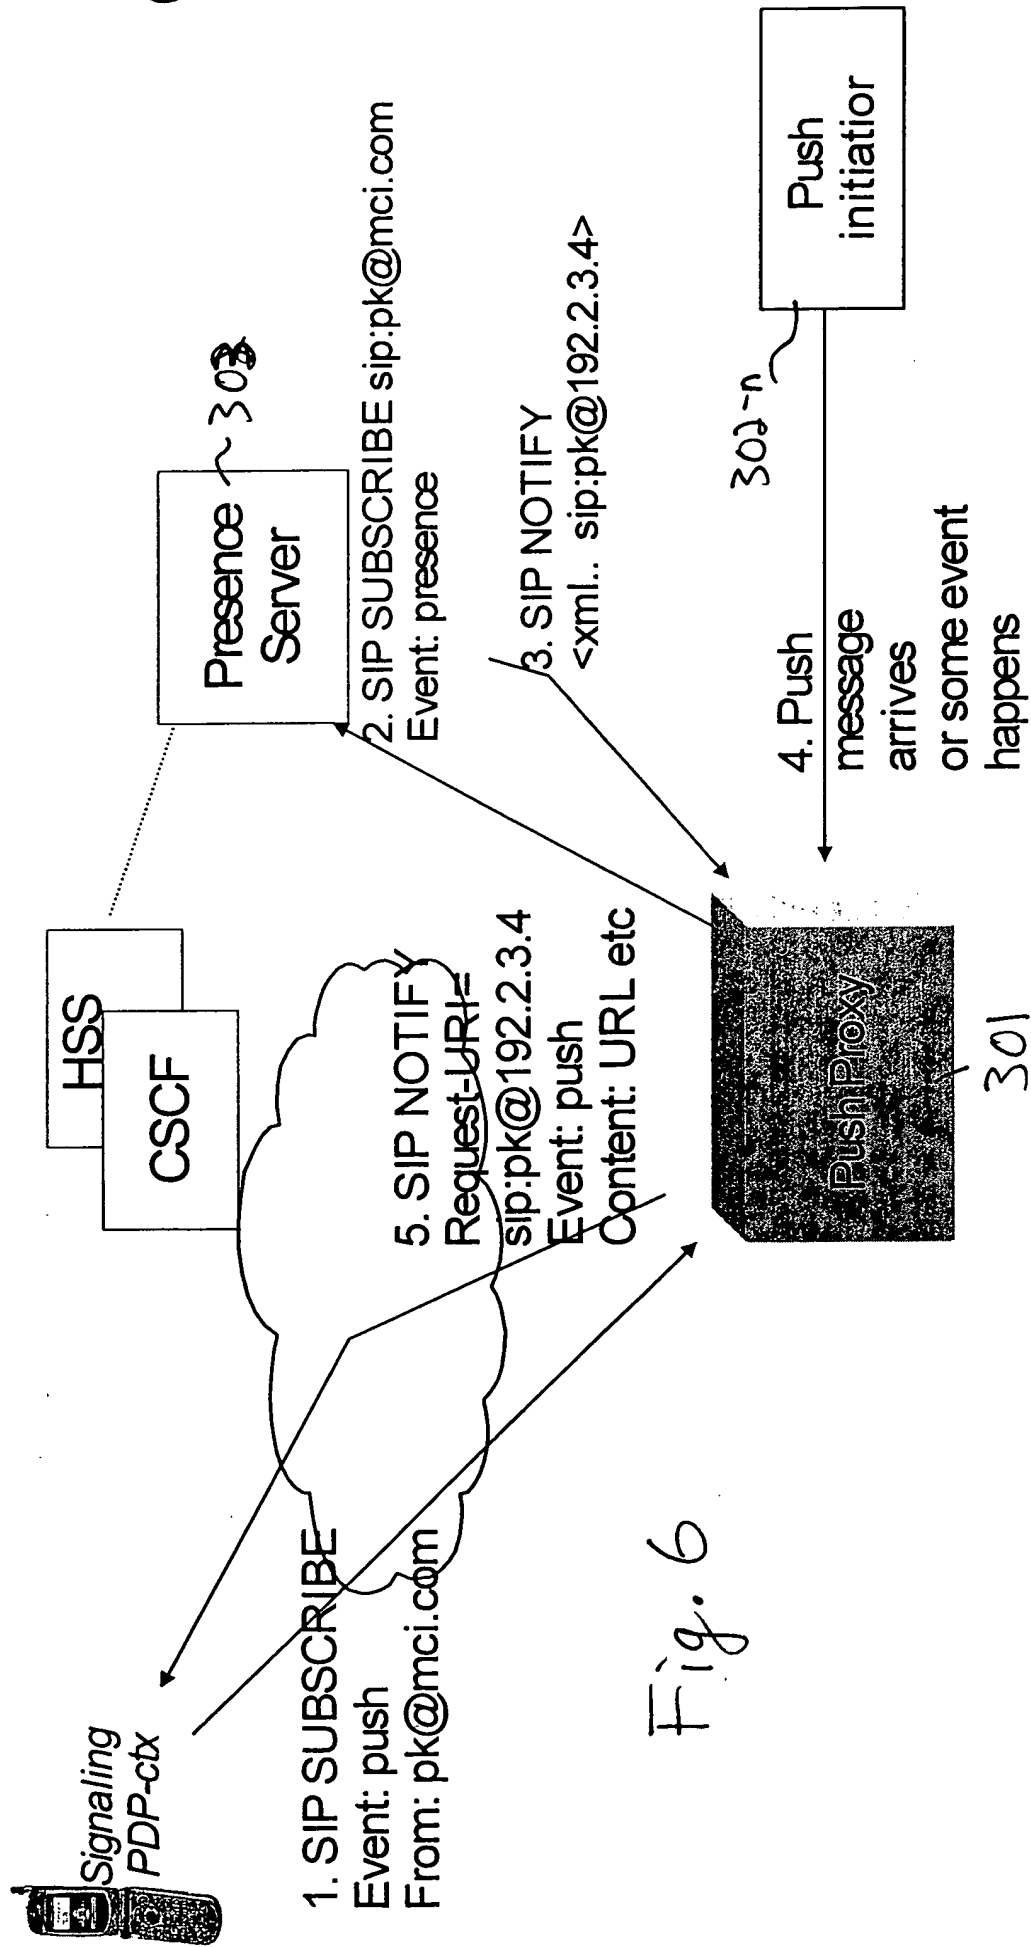


Fig. 6





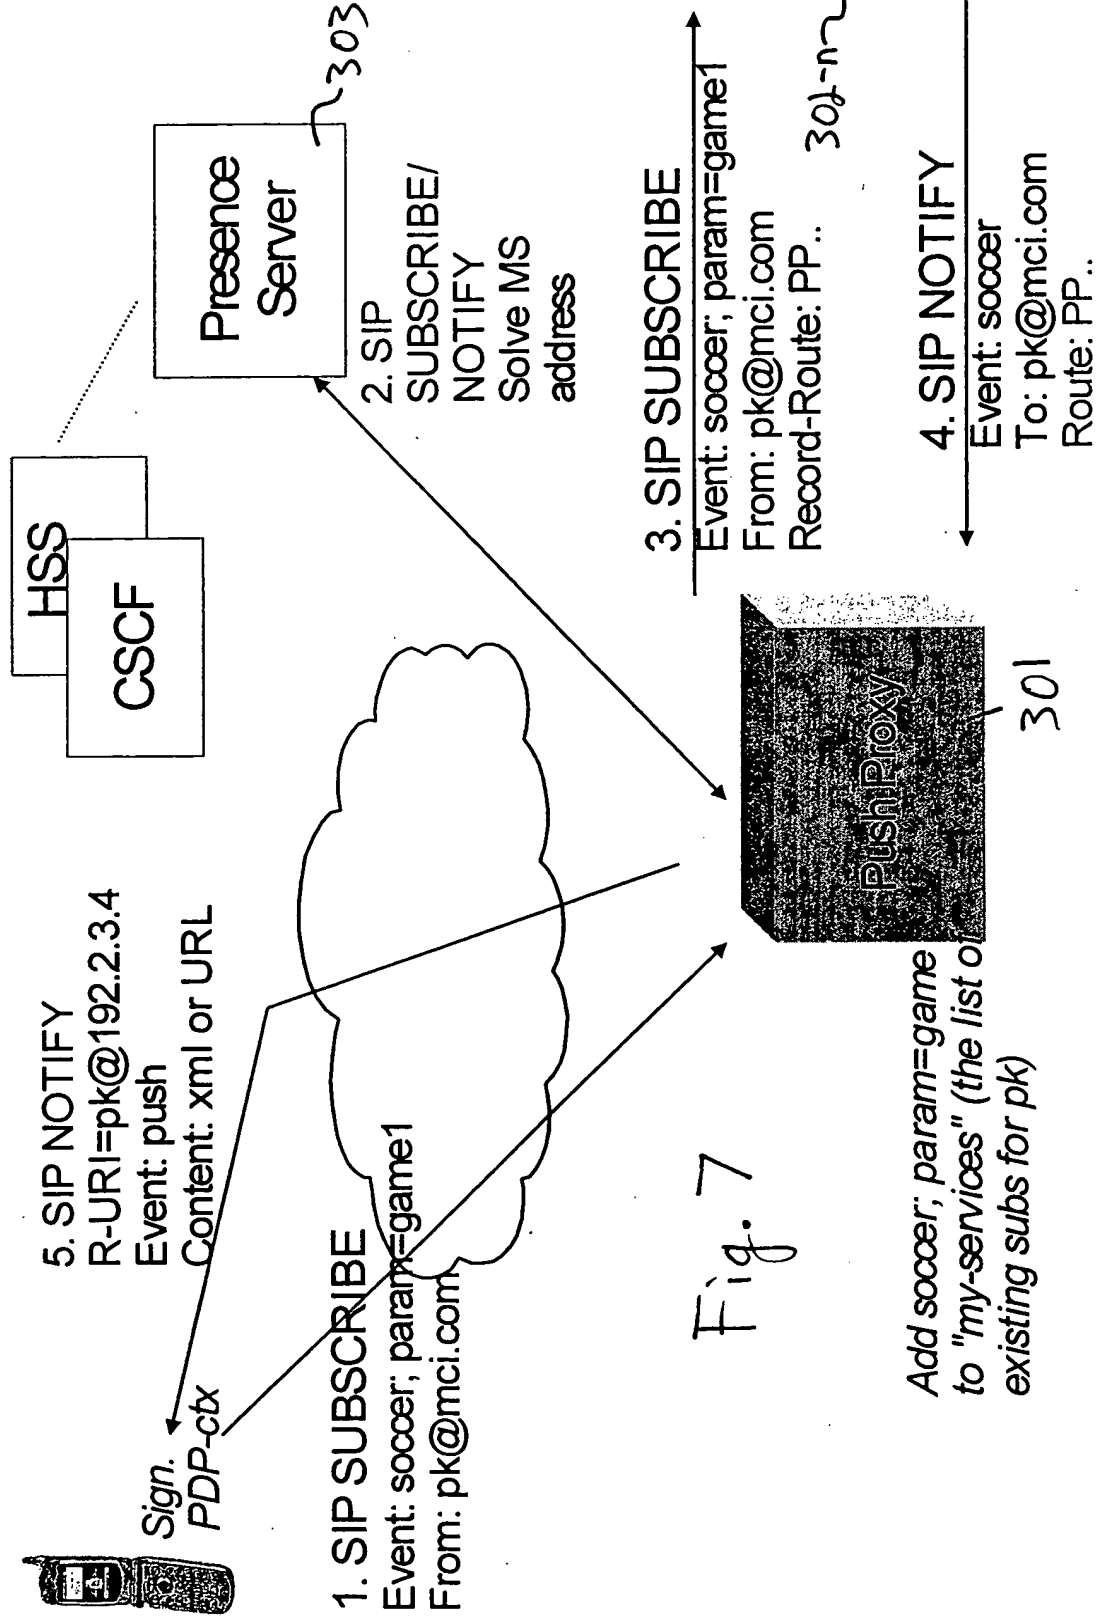

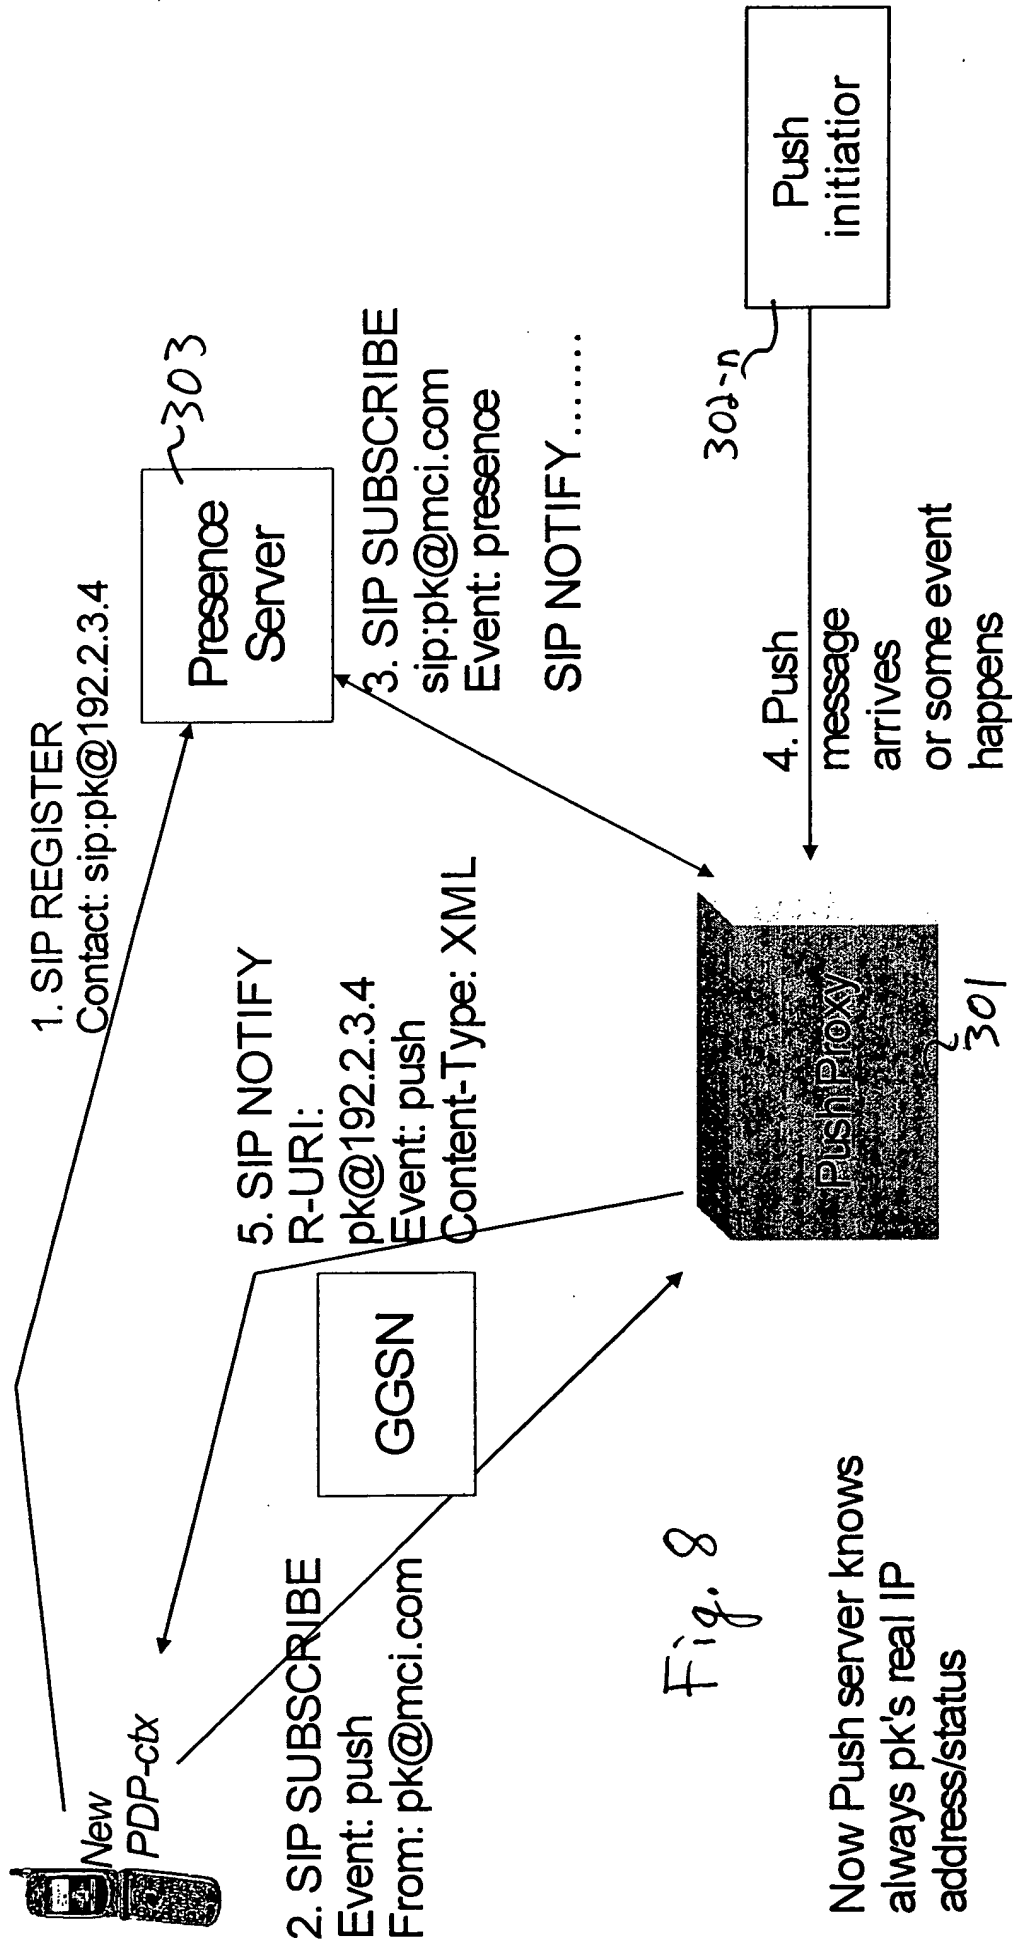

SIP or HTTP  
to manage  
subscriptions after  
they have been  
created by MT  
user..

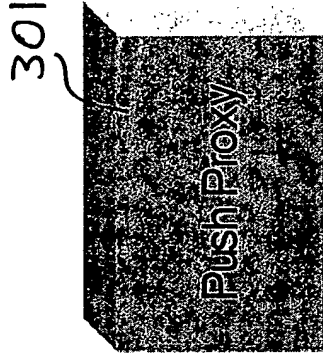


Fig. 9

Subscription/push database:

User: sip:john@mci.com = sip:john@192.99.99.77

Events:

soccerupdate; param=game292 R-URI=sip:soccer.com

User: sip:petri@mci.com = sip:pk@192.22.33.44; transport=UDP

Events:

soccerupdate; param=chelseagame19

soccerupdate; param=manugame25

chess

com.nokia.clubnokia; param=foo2

push1

ALLOW\_ALL

Push initiator:

R-URI=sip:soccer.com

R-URI=sip:manu.co.uk

R-URI=sip:robot@chess.fi

R-URI=sip:club.nokia.com

R-URI=localhost:50